


Premium Fixing Hammer for Split Stopper

Application Instructions

The ball and socket joint allows a deviation of max. 5 degrees from the level impact angle.




max. 5°

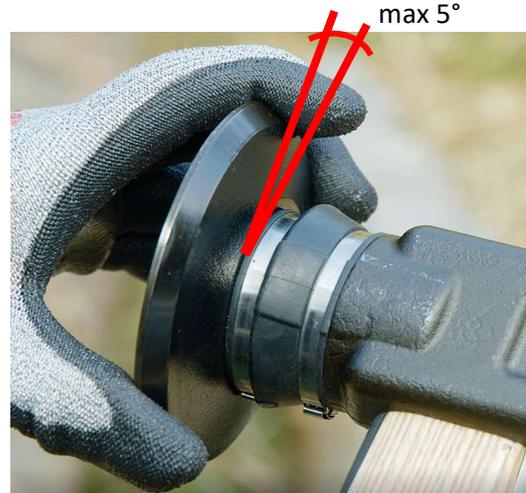

max 5°

1. Place the split stopper in the middle of the impact plate.

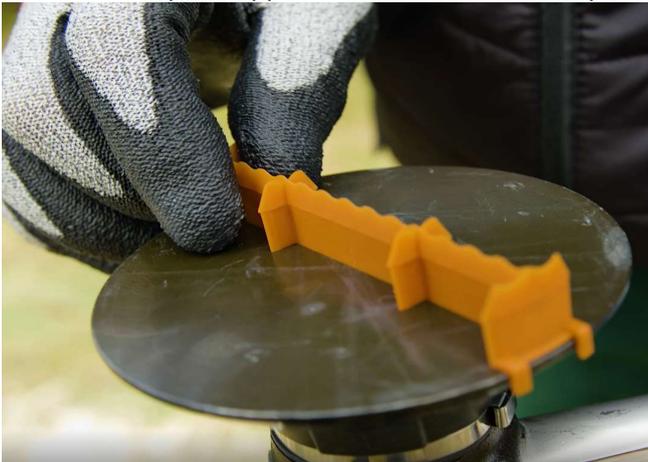

2. The four hooks must snap into place on the impact plate.




3. Align the impact plate parallel to the front side of the wood and hammer the stopper in with one hit, if possible.



Caution: The split must be between the two inner crossbars.



The split stopper must penetrate 100% of the wood with the first hit, don't hit again!
Risk of breakage and splintering!

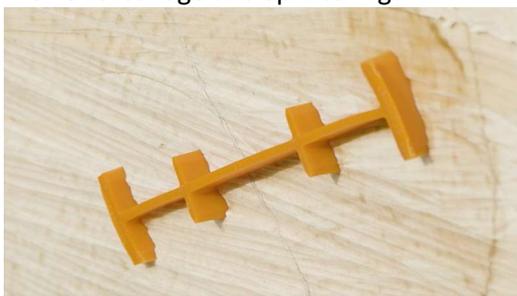

Don't hit again!

Wear Protective Equipment!



Observe national safety regulations!



Improper Use:



The hammer with the split stopper must be placed straight on and hit within a 5 ° angle.

Incorrect use can damage the hammer head.

straight

CORRECT



angle over 5°

WRONG




angle over 5°

WRONG




Place the split stopper in the middle of the impact plate.

CORRECT

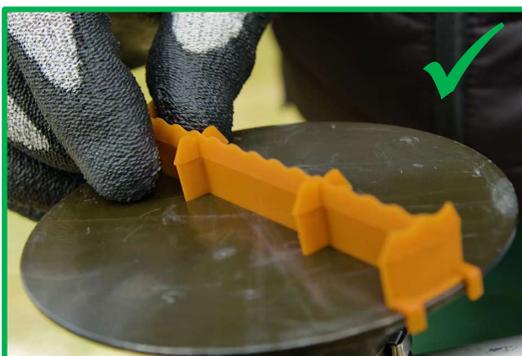

WRONG

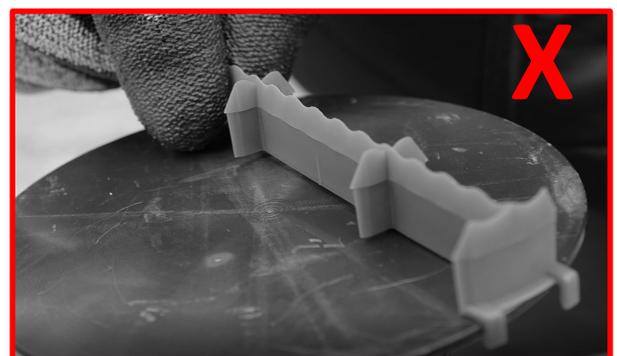



If the split stopper did not penetrate 100% of the wood with the first hit, don't hit again!
Also not with the back of the hammer head.
Risk of breakage and splintering!

CORRECT



WRONG



WRONG - RISK OF SPLINTERING



Wear Protective Equipment!

Observe national safety regulations!

